


# BORING INSTRUCTIONS

## ADJUST-A-BODY™ TENSIONER WITH THREADED BOLT

Drill and tap holes as indicated below:

Part No.	Used with Cable Dia.	Drill and Tap Hole
A-JTB6	1/8"	5/16-24 2B
	3/16"	
A-JTB8	1/4"	

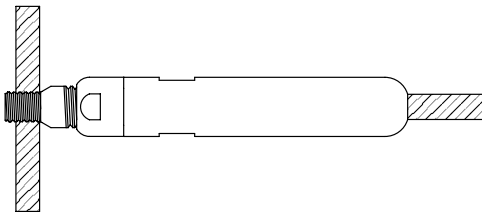


## ADJUST-A-BODY™ TENSIONER WITH THREADED EYE

If part is being mounted using an Invisiware® Fixed Tab or Threaded Tab, see boring instructions for those parts.

If part is being mounted to a structural tee, angle iron or steel plate, drill holes as indicated below:

Part No.	Used with Cable Dia.	Hole Dia.	Max Dimension from Front Edge of Mounting Surface to Hole Center
A-JTE6	1/8"	.313"	.375"
	3/16"		
A-JTE8	1/4"	.438"	.500"

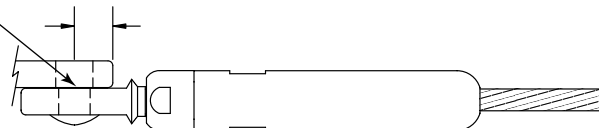

## ADJUST-A-JAW® TENSIONER AND ULTRA-TEC® FIXED JAW

If part is being mounted using an Invisiware® Fixed Tab or Threaded Tab, see boring instructions for those parts.

If part is being mounted to a structural tee, angle iron or steel plate, drill holes as indicated below:

Part No.	Used with Cable Dia.	Hole Dia.	B Max Dimension from Front Edge of Mounting Surface to Hole Center	A Jaw Opening
A-J62	1/8"	.313"	.375"	.260"
	3/16"			
A-J82	1/4"	.438"	.500"	.390"
A-J112	5/16"			
	3/8"			

